

Precision Adapters in Series


► 2.4mm to 2.4mm

Electrical


| | |
|----------------|-------------------|
| Frequency | DC to 50 GHz |
| Insertion Loss | 0.45 dB @ 50 GHz |
| Impedance | 50Ω |
| VSWR | 1.2 : 1 max. |
| Temperature | - 40°C to + 125°C |

Materials

| | | |
|----------------|---------------------|-------------|
| Body | Stainless Steel | Passivated |
| Center Contact | Brass / BeCu | Gold Plated |
| Insulator | Engineering Plastic | - |

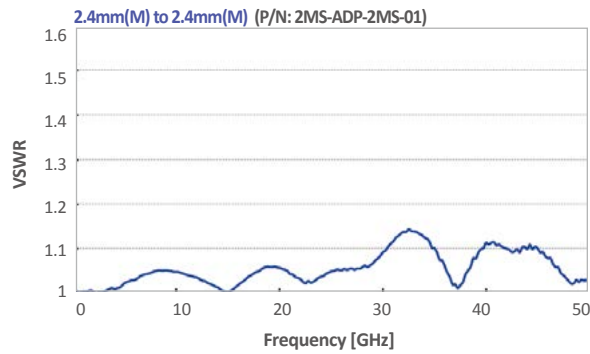


2.4 mm (M) - 2.4 mm (M)

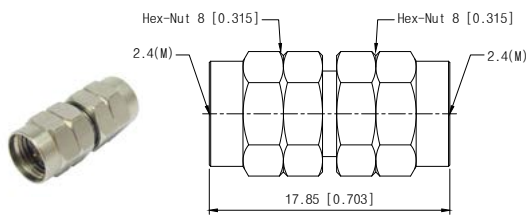


- Part No. 2MS-ADP-2MS-01 (G01M01MSD001)
- Freq. 50 GHz
- VSWR Max. 1.2

2.4 mm (M) - 2.4 mm (F)

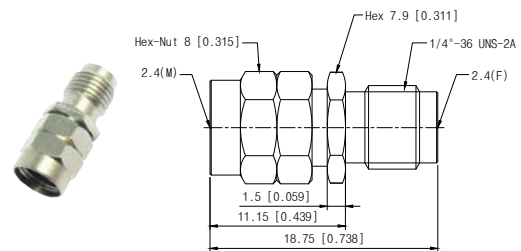

- Part No. 2MS-ADP-2FS-01 (G01M01FSD001)
- Freq. 50 GHz
- VSWR Max. 1.2

2.4 mm (F) - 2.4 mm (F)

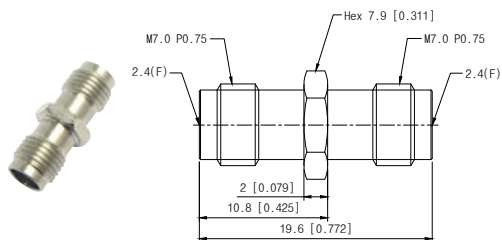

- Part No. 2FS-ADP-2FS-01 (G01F01FSD001)
- Freq. 50 GHz
- VSWR Max. 1.2