


► 2.4 mm to 2.92 mm

Electrical

Frequency	DC to 40 GHz	
Insertion Loss	0.35 dB @ 40 GHz	
VSWR	1.22:1(@40GHz)	
Temperature	- 40°C to + 125°C	


Materials

Body	Stainless steel	Passivated
Center Contact	Beryllium Copper(BeCu) Brass	Gold Plated Gold Plated
Insulator	Engineering Plastic	-

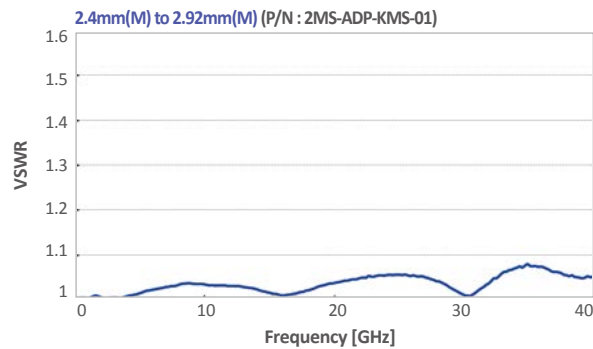


Unit : mm [Inch]

2.4 mm (M) - 2.92 mm (M)

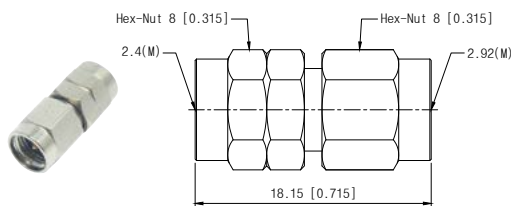


- Part No. 2MS-ADP-KMS-01 (G01M02MSD001)
- Freq. 40 GHz
- VSWR Max. 1.2

2.4 mm (M) - 2.92 mm (F)

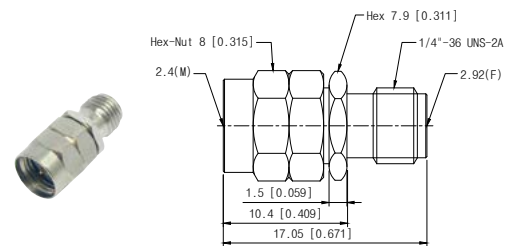


- Part No. 2MS-ADP-KFS-01(G01M02FSD001)
- Freq. 40 GHz
- VSWR Max. 1.2

2.4 mm (F) - 2.92 mm (M)

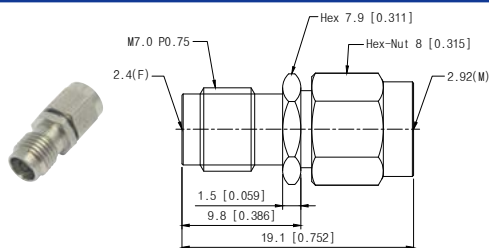

- Part No. 2FS-ADP-KMS-01 (G01F02MSD001)
- Freq. 40 GHz
- VSWR Max. 1.2

2.4 mm (F) - 2.92 mm (F)

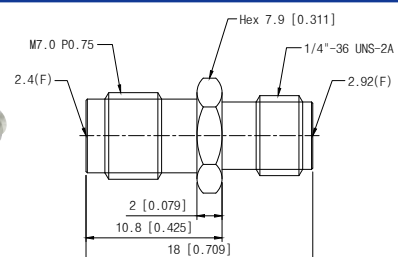

- Part No. 2FS-ADP-KFS-01 (G01F02FSD001)
- Freq. 40 GHz
- VSWR Max. 1.2